



## BalconyDrain

BalconyDrain is not limited to use in balconies. It can also be used in areas along the building line, for example, terraces, patios and other areas with restricted construction depth.


BalconyDrain is available in a choice of depths and widths to suit site, user and hydraulic requirements.

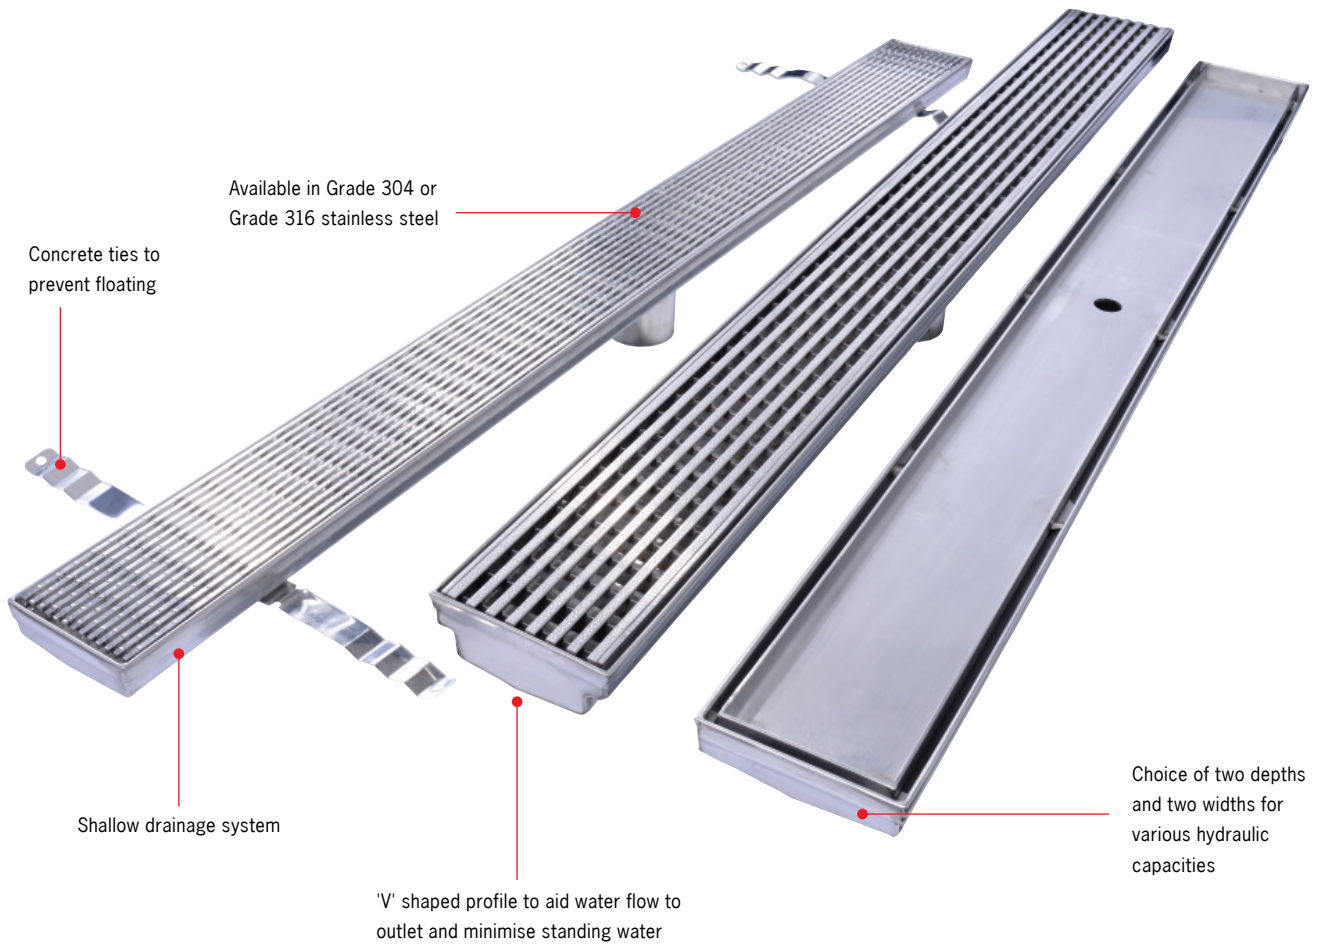


## Range of grates



**Affiner**



**5 Star Heelsafe® Anti-Slip**





**Linéaire**





**Tile**



### 25mm deep channels

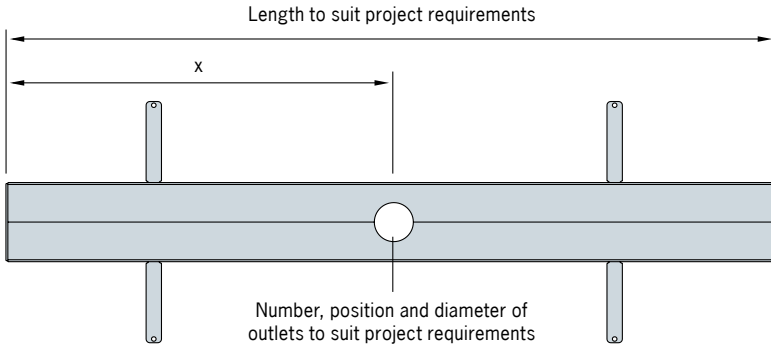

### 40mm deep channels

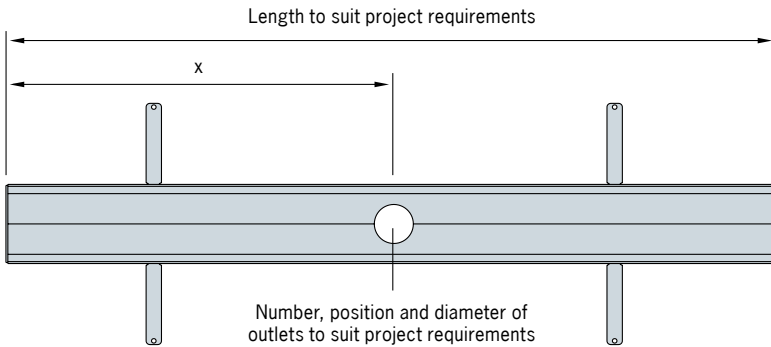

\* All dimensions in mm

Grate type	Slip resistance rating		Nominal channel width (mm)	Channel depth (nominal) mm	Specification code
	Wet pendulum	Wet barefoot			
Affiner	P1	A	85	25	<b>S85-25-A</b>
			103	25	<b>S103-25-A</b>
			103	40	<b>S103-40-A</b>
5 Star	P4	C	103	40	<b>S103-40-5S</b>
Linéaire	P1	-	85	25	<b>S85-25-L</b>
			103	25	<b>S103-25-L</b>
			103	40	<b>S103-40-L</b>
Tile	The slip resistance of this grate depends on the infill material specified.		85	25	<b>S85-25-T</b>
			103	25	<b>S103-25-T</b>
			103	40	<b>S103-40-T</b>

\* To customise your requirements, contact ACO.

